


MISA 2020

Zhrnutie




info

37.5 C
hodnota

37.5 C
hodnota



37.5 C
hodnota



SENZOR
zafixenie
prevod signalu

Arduino
linearnizacia
dizky...

USB → RS232

BT → RS232

on-line
off-line



Bezpečnosť?


odpočítavač
= bezpečnosť
!?



0,01 - 0,1s

0,1 - 10s


1 - 10s, min,
dni

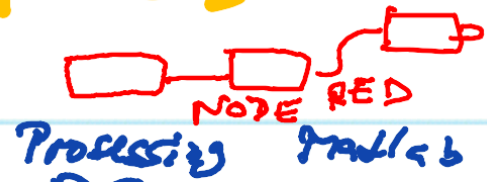

MQTT

{ json: value }



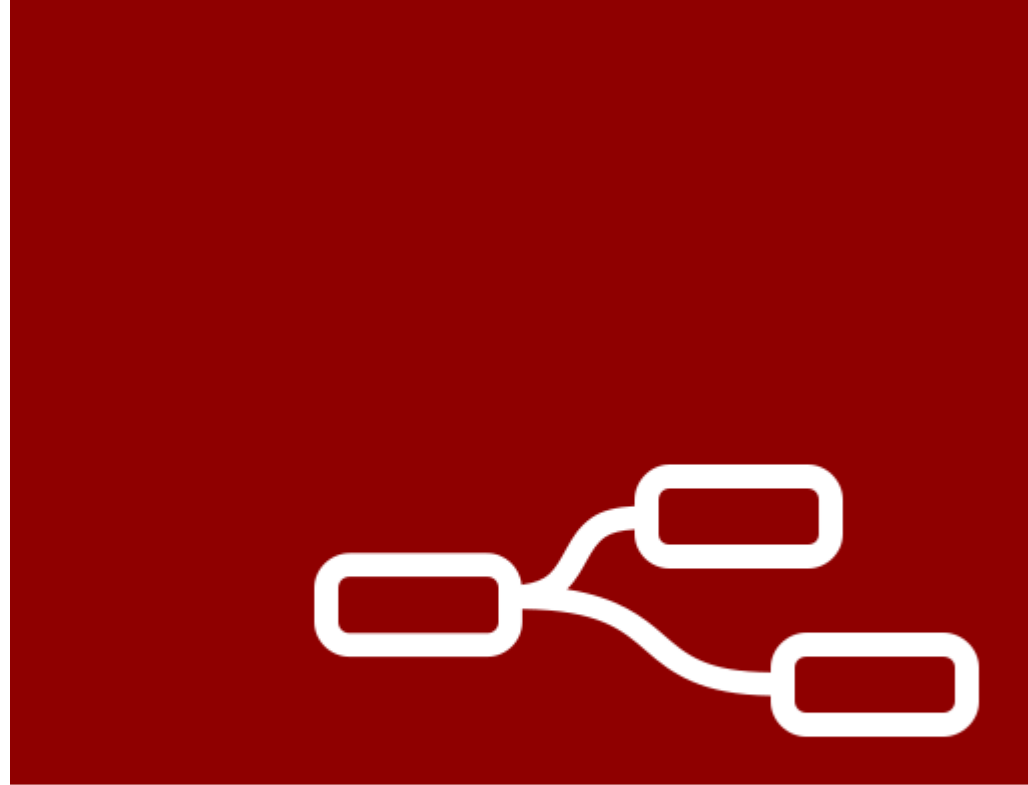

Node-RED

filter nodes

Teplota a vlhkost'

common

- inject
- debug
- complete
- catch
- status
- link in
- link out
- comment

function

- function
- switch
- change
- range
- template
- delay

